

Technical Documentation

for metraTec QuasarMF RFID Reader



Date: December 2016

Version: 1.5

Table of Contents

1 General Information / Security Advice.....	3
1.1 Notes on the use of this documentation.....	3
1.2 Security Advice.....	3
1.3 Export Restrictions.....	3
1.4 Further Documents.....	3
2 Product Description.....	5
2.1 Intended Use.....	5
2.2 Technical Specification.....	5
2.3 Product Drawing.....	6
2.4 Scope of Delivery.....	6
2.5 Accessories.....	6
3 Power Supply and Electrical Specification.....	7
4 Communication.....	8
4.1 USB Driver Installation.....	8
5 Antenna Connection.....	9
6 Digital Input/Outputs.....	10
7 Further Notes.....	12
7.1 Environmental.....	12
7.2 Declaration of Conformity.....	12
8 Version Control.....	13

1 General Information / Security Advice

1.1 Notes on the use of this documentation

This user manual and integration guide uses different symbols to point out potentially dangerous situations. The following signs and symbols are used throughout the document.



ATTENTION

Declares a potentially hazardous situation. If this is not avoided, the product or something in its surrounding could be damaged.



NOTE

Declares notes for the user as well as other useful information, where no harmful or dangerous situations can be expected.

1.2 Security Advice

The QuasarMF HF RFID Reader was not designed for use in dangerous environments. Using this product in applications where a failure could directly result in severe injuries or death (“high risk activities”) is not permitted. This includes but is not limited to applications in nuclear facilities, flight control systems, life support systems or weapon systems. The manufacturer denies the suitability of this device for such scenarios.

1.3 Export Restrictions

The QuasarMF contains components that underlie US Export restrictions. It is therefore forbidden to export the product to countries that are on the US trade embargo list. The same applies to any countries that are on the EU embargo list.

1.4 Further Documents

While this documentation explains the electrical and mechanical characteristics of the QuasarMF RFID Reader, it might be useful to also read the [metraTec Protocol Guide](#), which explains the protocols used to control the reader in full detail.

We also offer general information about how to set up the connection of the reader to the antenna for optimum system performance in our [HF Antenna Integration Guide](#).

All further documents can be either found at the metraTec's product web page or are listed at:

<http://www.metratec.com> → Support → Downloads → Documentation

2 Product Description

The QuasarMF is an HF RFID reader/writer for demanding industrial applications or embedded systems, where high reading reliability, speed and extensive special tag features are needed.

Highlights include a reading rate of up to 50 tag-IDs/sec and reading and writing data on tags without needing to address them individually.

2.1 Intended Use

RFID Reader/Writer for wireless communication with RFID transponders according to ISO14443A and MIFARE® protocols MIFARE Classic, MIFARE Ultralight® and MIFARE Plus®.

2.2 Technical Specification

Operating Voltage	24 V DC
Digital Inputs/Outputs	optically isolated 24V DC Inputs (2x), 24 V DC Outputs (4x), 24 V DC Out (1x)
Operating Frequency	13.56 MHz
System Impedance	50 Ohm
RF Output	250 mW
Power Consumption	200 mA (without Ethernet) / 450 mA (with Ethernet)
Operating Temperature	-40°C to +85°C
Dimensions	130 x 105 x 44 mm
Protection	IP 40 (Other on Request)
Conformity	CE, e.g. EN 60950-1, ETSI 300 330.

2.3 Product Drawing

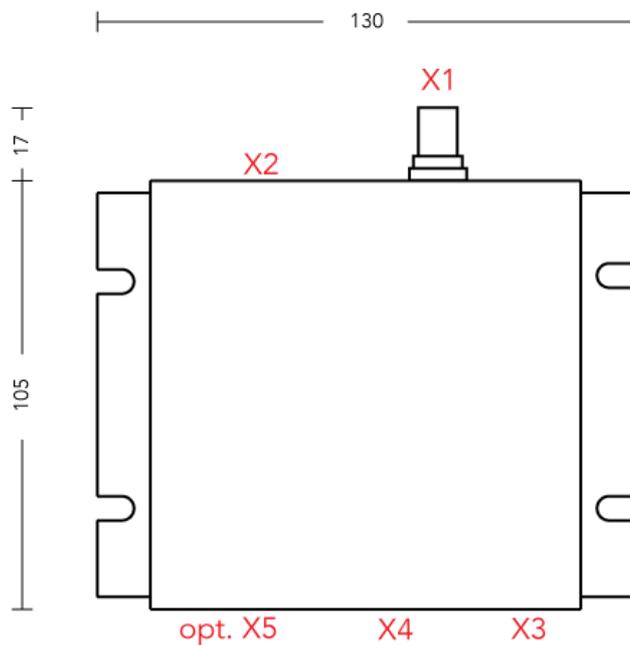


Fig. 1: Dimensions of QuasarMF RFID Reader (in mm)

2.4 Scope of Delivery

The QuasarMF RFID Reader comes with the following parts:

- QuasarMF HF RFID Reader
- 24V DC power supply
- Documentation, Drivers and Demo Software are available via download from metraTec's website

2.5 Accessories

The following accessories and modules are available to extend and evaluate the functionality of the QuasarMF HF RFID Module:

- Multiplexer (4x, 8x and 16x)
- Various HF-Antennas
- Coaxial cables

3 Power Supply and Electrical Specification

The QuasarMF is powered using 24 V DC which are connected at the front of the device (X3). If you do not use a power supply supplied by metraTec, please make sure that your own PSU provides a supply voltage of high quality. If possible, use a PSU with high precision/high speed linear regulator. If you use a switching PSU, please make sure that the switching frequency is > 500 kHz.

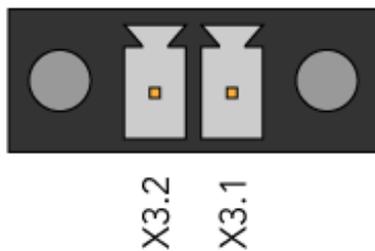


Fig. 2: Power Connector Description (ref. Tab. 1)

Connector	Description
X3.1	GND
X3.2	24V DC

Tab. 1: Description of Power Connector

Operating Voltage	24 V DC
Power Consumption ¹ , RF on	200 mA
Power Consumption ¹ , RF off	80 mA
Power Consumption ¹ , Sleep	20 mA
Voltage Inputs/Outputs	24 V

Tab. 2: Maximum Rating and Electrical Limits

¹ Note: For Ethernet power consumption is increased by 250 mA.

4 Communication

The QuasarMF offers several options as a host interface. Each version has a USB connection. Additionally, versions with Ethernet, WiFi or ZigBee are available, the latter two on special request.

4.1 USB Driver Installation

The basic option for connecting the QuasarMF with your host PC is using the USB connection every reader has.

1. Connect the reader with a 24V DC power source as described before.
2. Connect the reader with a PC using a USB cable (X4).
3. Install the USB driver. metraTec offers the needed driver including Installation Guides for Windows XP and Windows 7 (as downloads from metraTec's website).

5 Antenna Connection

To send and receive data to and from the tags an appropriate HF RFID antenna (13.56 MHz, 50 Ohm) has to be connected to the reader. This is done via the BNC connector on the reader (X1).

Since the design of HF antennas can be a task requiring expert knowledge, metraTec RFID Solutions offers a range of standard antenna types for HF applications which are compatible to the QuasarMF. Further, we offer an antenna design service for custom designs. Most antennas come equipped with standard BNC connectors which can be directly connected to the QuasarMF. In cases in which a different antenna geometry or connector is needed please contact support@metratec.com.

To connect the antenna to the reader or multiplexer the devices are equipped with BNC jacks. Necessary cables are therefore equipped with BNC plugs at both ends. When connecting antennas with multiplexers or readers please keep in mind that the cable has a signal dampening effect reducing the HF power reaching the antenna. If long cables are to be used in connection with one or more multiplexers the reading range can be reduced measurably. Using higher quality cables can reduce the power loss in cases in which this is important. Recommended cables with different lengths can be ordered from metraTec as accessories.



ATTENTION

Always connect an 50 Ohm antenna as described above first, before powering the device. Powering the reader without an appropriate 50 Ohm load for a longer time could damage the reader permanently.

6 Digital Input/Outputs

The QuasarMF has 2 digital input pins and 4 digital output pins which can be read or set via the reader. The input pins are optically isolated 24 V DC inputs as common in automation technology in general. Up to 25 mA are needed to set the input to "high".

The output pins are 24 V high side switch DC outputs with a maximum current of 250 mA per pin. These can be used to directly power e.g. signal towers. In total a maximum current of 1000 mA for all pins is allowed. Outputs are equipped with internal overcurrent and overtemperature shutdown.

The pins X2.1 and X2.2 are connected directly to the power supply input, i.e. the applied voltage is 24 V DC. This can be used for power supply of e.g. sensors, etc. The power of these pins is only limited by the power of the power supply used.

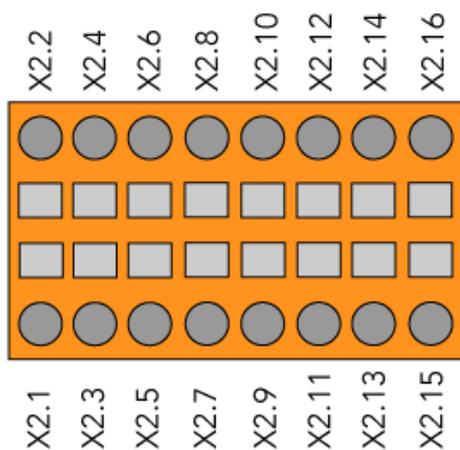


Fig. 3: Connector description of QuasarMF

Connector	Description
X2.1	GND
X2.2	24 V DC Out
X2.3	Out 1 -
X2.4	Out 1 +
X2.5	Out 2 -
X2.6	Out 2 +
X2.7	Out 3 -
X2.8	Out 3 +
X2.9	Out 4 -
X2.10	Out 4 +
X2.11	In 1 -
X2.12	In 1 +
X2.13	In 2 -
X2.14	In 2 +
X2.15	GND
X2.16	24 V DC


Tab. 3: Pin Description for digital IOs. Note: All "Out X -" are connected to ground internally!

7 Further Notes

7.1 Environmental

Electronic devices like the QuasarMF are covered by the (German) ElektroG (electronic waste law) as well as the European WEEE directive and as such may not be disposed of by way of the normal household trash. Instead they have to be recycled properly. For you as our customer this is no additional burden, however, as you can send the device back to us for proper recycling. We assure you that the devices received back will be recycled properly and in an environmentally friendly way. Our WEEE Registration ID is DE 56060482.

When selecting electronic components we additionally made sure that all components are free of heavy metals and other harmful substances as required by the RoHS Directive for many industries. Hence, our products are produced in the most environmentally friendly way possible.

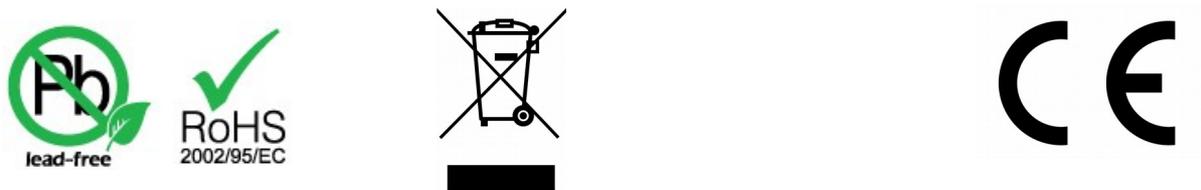

7.2 Declaration of Conformity

The QuasarMF complies with all directives and regulations applicable in the European Union for this kind of device. This especially includes all laws regarding use of spectrum and EMC. The product therefore bears the CE sign, as required by Directive 1999/5/EC (Radio & Telecommunication Terminal Equipment Directive).

The product is currently not registered for use in the US or Canada. However, metraTec is registered as a manufacturer of electronics at the FCC and IC. A certification of this product is therefore possible, if required. Please ask us or your system integrator for further information.

8 Version Control

<i>Version</i>	<i>Change</i>	<i>by</i>	<i>Date</i>
1.0	created	KD	19.05.2010
1.1	24V DC power supply added	KD	22.10.2010
1.2	corrected use of label MIFARE	CS	20.01.2014
1.3	correction of scope of delivery, minor edits, translation to English	CS	30.10.2014
1.4	HF Antenna Integration Guide mentioned, minor changes	CS	05.05.2015
1.5	update address	KS	07.12.2016

Contact

metraTec GmbH
Niels-Bohr-Str. 5
39106 Magdeburg, Germany

Tel.: +49 (0)391 251906-00
Fax: +49 (0)391 251906-01

Email: support@metratec.com
Web: <http://www.metratec.com>

Copyright

© 2016 metraTec GmbH

Reprint or reproduction of this documentation for other than internal purposes is only allowed with written permission by metraTec GmbH.

All trademarks are the property of their respective owners. All rights reserved.

MIFARE® Classic, MIFARE Ultralight®, and MIFARE Plus® are registered Trademarks of NXP B. V. and are used under license.

We are constantly improving our products. Changes in function, form, features can happen without prior notice.